




ACO Slimline
Dom i vrt

ACO Slimline

Prednosti proizvoda

- 6 cm uska rešetka s prorezima
- brzo polaganje zahvaljujući ljepljivim klik-klak spojevima
- prirubnice na spojnim elementima za sidrenje u temelju
- jednostavno uklanjanje rešetke za potrebe čišćenja kanala

- prema HRN EN 1433
- prohodno
- brtvljenje s standardnim PVC ljepljivom

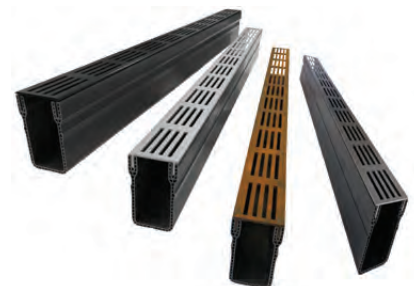

	Opis	Dimenzije			Težina [kg]	Pakiranje [kom]	Art.br.
		Dužina	Širina	Visina			
		[mm]	[mm]	[mm]			
Kanalica s rešetkom iz aluminija (srebrno eloksan)							
	kanalica za odvodnju	1000	60	100	1,6	72	19000
	kutni element	159	60	100	0,5	4	19006
Kanalica s rešetkom iz aluminija (crno eloksan)							
	kanalica za odvodnju	1000	60	100	1,6	72	19005
	kutni element	159	60	100	0,5	4	19007
Kanalica s rešetkom iz Corten čelika							
	kanalica za odvodnju	1000	60	100	2,8	72	19012
	kutni element	159	60	100	0,7	4	19013
Kanalica s rešetkom iz nehrđajućeg čelika							
	kanalica za odvodnju	1000	60	100	2,8	72	19058
	kutni element	159	60	100	0,7	4	19059

	Opis	Dimenzije			Težina [kg]	Pakiranje [kom]	Art.br.
		Dužina	Širina	Visina			
		[mm]	[mm]	[mm]			
Čeona stijenke i spojni elementi							
	Čeona stijenka	20	60	100	0,1	50	19004
	Spojni element Standard	100	100	71	0,1	50	19001
	Spojni element asimetrični	100	97	71	0,1	25	19009
	Spojni element za T-spoj	179	118	103	0,8	25	19083
Izljevni elementi							
	Čeona stijenka s izljevom DN 50	44	60	100	0,1	25	19003
	Vertikalni izljev DN 80	100	100	97	0,1	25	19002
	Vertikalni izljev DN 80 ekscentričan	100	100	97	0,1	25	19008
	Vertikalni izljev DN 110 ekscentričan	133	135	132	0,2	25	19011
	Bočni izljev DN 80	120	107	111	0,2	25	19082
Pribor							
	Pila za rupe \varnothing 45 mm za vertikalni otvor	180	45	45	0,2	5	19010
	Taložna posuda	100	45	65	0,2	25	19014